

07/20/00

J0813 U.S. PTO

7-21-00

A

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</i>	Attorney Docket No.	MOT-D2149
	First Inventor or Application Identifier	Raymond Bontempi
	Title	RESERVATION/RETRY MEDIA ACCESS CONTROL
	Express Mail Label No.	EL413096480US

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	ADDRESS TO: Commissioner for Patents Box Patent Application Washington, DC 20221
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <i>(Submit an original and a duplicate for fee processing)</i> 2. <input checked="" type="checkbox"/> Specification [Total Pages 24] <i>(preferred arrangement set forth below)</i> - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 5] 4. Oath or Declaration [Total Pages 2] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <i>(for continuation/divisional with Box 16 completed)</i> i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b). *NOTE FOR ITEMS 1 & 3: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY'S STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission <i>(if applicable, all necessary)</i> a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
ACCOMPANYING APPLICATION PARTS 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney <i>(when there is an assignee)</i> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i> 13. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Statement(s) Status still proper and desired <i>(PTO/SB/08-12)</i> 14. <input type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i> 15. <input checked="" type="checkbox"/> Other: Certificate of Mailing by Express Mail and a check in the amount of \$730.	


16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner: _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS <input checked="" type="checkbox"/> Customer Number or Bar Code Label 24375 or <input type="checkbox"/> Correspondence address below <i>(Insert Customer No. or Attach bar code label here)</i>			
Name			
Address			
City	State	Zip Code	
Country	Telephone	Fax	

Name (Print/Type)	Kao H. Lu, Esquire	Registration No. (Attorney/Agent)	43,761
Signature		Date	7/20/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

RESERVATION/RETRY MEDIA ACCESS CONTROL

BACKGROUND

The present invention relates to an enhanced contention based medium access control method and apparatus in a communication system. More particularly, the invention relates to a protocol for monitoring communication traffic on a CATV system.

Over the past few years, the availability of CATV services to individual homes has increased dramatically. CATV systems have become increasingly popular and the diversity of available services has grown. Those services now include pay per view, on-line banking, home shopping and most importantly, internet access. CATV services are no longer limited to transmitting video programs from a headend to the settop terminals. Settop terminals may download data from the headend and upload program selections and other data to the headend. Accordingly, the volume of upstream communications from settop terminals to the headend has increased since the interactive features of CATV services require realtime feedback from the settop terminals.

A typical CATV network consists of a cable plant with the headend connected to individual settop terminals through a shared medium, such as a coaxial cable or a fiber optical cable. In a typical bi-directional CATV network, the upstream channels carry information which is transmitted from the plurality of settop terminals to the headend; and downstream channels carry information which is transmitted from the headend to the settop terminals. Since the settop terminals typically share one or more upstream channels, medium access control (MAC) is needed to manage the accessibility of the upstream channels for all settop terminals sharing the channel.

It is preferable to respond to a user's demands and allocate capacity accordingly in an asynchronous or dynamic fashion. Various MAC mechanisms have been developed to address this need. ALOHA MAC was one of the first MAC techniques developed for packet radio networks. In a simple ALOHA MAC network, a sending settop terminal first sends its data frame to the MAC controller. The settop terminal then listens for a period of time equal to the maximum possible round-trip propagation delay on the network, (twice the time it takes to send a frame between the two longest physically located users), plus a small fixed time increment. If the sending settop terminal receives an acknowledgment (ACK) response from the MAC controller within that period, the transmission was successful. Otherwise, the sending settop terminal retransmits the frame. If the sending settop terminal fails to receive an ACK after repeated transmissions, it gives up.

During transmission, a frame may be corrupted due to noise on the channel or a collision, which occurs when more than one settop terminal transmits a frame at the same time and the frames on the shared channel collide. A MAC controller may determine the correctness of an incoming frame by examining a checksum. If the checksum is correct, the receiving MAC controller immediately sends out an ACK.

One problem of a network implemented with the simplest ALOHA MAC mechanism is that the system will quickly collapse when there is a rapid increase in the number of frame collisions with increased load. Therefore, the maximum utilization of the ALOHA channel approaches only about 20% under optimum network conditions of traffic load; and in practical usage it is far lower. Slotted ALOHA MAC was developed to combat this inefficiency. Slotted ALOHA MAC divides the contended network medium into uniform time slots whose size equals the frame transmission time. Each settop terminal can only

MOT-D2149

transmit its message at the beginning of a time slot. The slotted ALOHA MAC increases the overall utilization of the channel, approaching 40% under perfect circumstances of network traffic. Nevertheless, a central clock or other timing technique is required to synchronize all users in such a slotted ALOHA MAC network. Such a mechanism is usually
5 costly and complex.

Another asynchronous access control approach is frequency-division multiple access (FDMA) where different frequencies are allocated to each settop terminal. This requires a large reservation of channel bandwidth and is inefficient for terminals that are not transmitting most of the time.

Both asynchronous access control approaches provide moderate performance for constant bandwidth and latency traffic, but do not make efficient use of bandwidth and require more expensive headend control equipment. Other asynchronous approaches include round robin, reservation and collision sense (CD/CSM).

For round robin systems, such as token ring, each user settop terminal may either decline to transmit or transmit for predetermined period of time when the user is in receipt of a token that is passed around the network. The user may not transmit when the user does have the token. This technique can be very efficient if there are not many settops on the network and they have very small amounts of data to transmit. However, user settop terminals which have no data to transmit add considerable overhead to such a system.
15

Reservation techniques, which are best suited for stream traffic, divide the medium into time slots. A user settop terminal wishing to transmit data reserves future slots for use via a centralized controller. This mechanism requires more complex headend equipment and fails to adequately address the need of terminals to transmit bursty data of substantial length.
20

More complicated and complex control mechanisms such as carrier sense multiple access (CSMA) or collision detection (CD) is widely used in many networks. These systems usually require more expensive terminal hardware and suffer some of the same network breakdown problems as ALOHA, albeit at higher network utilization.

5 CATV networks have unique characteristics and requirements. CATV networks are bidirectional communication networks utilizing different channels to transmit upstream and downstream data. The network may have hundreds of thousands or even millions of concurrent users receiving downstream broadcast messages simultaneously, while a majority of the users do not actively utilize an upstream channel. The huge number of users and the fact that most of the time a majority of users have no need to access upstream channels make it less efficient to implement a CATV network with either a synchronous or a round robin type MAC, which inefficiently divides access time to the upstream channels among all users equally. A complicated and costly CSMA/CD type MAC or any type of MAC that requires a central clock to synchronize all users is not justified in cost or efficiency.

15 SUMMARY

The present invention is a MAC system for controlling the transmission capacity of a shared communication channel in a CATV network having a central headend and a plurality of settops. The system utilizes an enhanced reservation mechanism, coupled with an ALOHA type MAC as the upstream traffic control mechanism to maintain the traffic flow of information from settop terminals to the headend and to increase efficiency of use of upstream bandwidth. The settop terminal can gain exclusive access to the upstream channel for the duration of its message which will reduce collisions and increase efficiency of

upstream bandwidth utilization. The present invention also includes a mechanism for minimizing the guardband times by determining optimal backoff times based on network usage to provide a more optimal usage of network bandwidth.

Objects and advantages of the present invention will become apparent after reading a detailed description of a presently preferred embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

The features of the present invention may best be understood by reference to the following description taken in conjunction with the following drawings and in the several figures of which like reference numbers identify like elements.

Figure 1 is a block diagram of network data flow in the system of the present invention.

Figure 2 is a comparison chart of the average delay time among ALOHA, TDMA and message MAC with 10% instantaneous senders.

Figure 3 is a comparison chart of the throughput of data packets per second among ALOHA, TDMA and message MAC.

Figure 4 is a comparison chart of the average delay time among ALOHA, TDMA and message MAC with 40% instantaneous senders.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is useful in CATV systems as well as any other communication system in which an optimized message MAC can increase upstream communication efficiency. The term "settop terminal" can be applied to any network

terminal with the capacity to perform various features described in the present specification. The term "cable television" and CATV used in the present specification is meant to encompass all such communication systems and is not limited to television communication. Similarly, the terms "upstream receiver", "downstream transmitter" and "message router" are network functional units and are not meant to be limited to CATV systems. Each functional unit can be an individual apparatus or be a part of multi-function apparatus.

Figure 1 illustrates the data flow block diagram in a network of one embodiment implemented the present invention. A message MAC network 5 includes one message router/headend 50, an upstream receiver 40, a downstream transmitter 70 and a plurality of settop terminals 10 sharing at least one upstream channel 30 and at least one downstream channel 60.

In the proposed mechanism, when a settop terminal 10 has data to send, it characterizes its upstream message into Type I or Type II, using the size of the upstream message or the assigned priority of each message as discriminating factors. The upstream message can be divided into several packets for transmission. A packet includes a header portion and a data portion. The header contains the packet sender's address and the packet designation address and may include other information. For example, a specific bit in the header of a packet will indicate whether it belongs to a Type I or Type II message. Type I packets are used for short "Type I messages" which fit in one or two packets. Type I packets are also used as reservation packets for Type II messages. Type II messages are long messages, relative to the size of Type I messages or other types of contentionbased packets.

Type I packets are used for very short messages, which can fit in a 1 or 2 packets. If there is more than one packet in a Type I message, the first packet contains the

MOT-D2149

information about the total number of packets in the complete message. In one embodiment, as explained in further detail herein, in addition to transferring a small amount of data, the Type I message serves as a network command, self-acknowledging to the transmitting settop terminal 10 that the packet has reached the message router 50. This embodiment precludes
5 the need for dedicated headend equipment to provide packet acknowledgment.

Type I message operation is as follows. When a settop terminal 10 has a small message to send upstream, a Type I upstream packet will be created in the settop terminal 10 with header bits that indicate that the packet contains the actual transmitted message. Although a Type I message may consist of several packets, for simplicity of explanation a single-packet message will be explained herein. Those of skill in the art would recognize that for a multi-packet Type I message, the same procedure would be followed for each of the subsequent packets.

After creation, the Type I packet is transmitted immediately into the upstream channel 30. The upstream receiver 40 receives the Type I packet, checks to determine the type of packet and directly forwards a copy of the packet to the downstream transmitter 70 and a copy of the packet the message router 50. The downstream transmitter 70 further forwards the Type I packet through downstream channel 60 to its group of downstream settop terminals 10. When the Type I packet originating settop terminal 10 receives back the sent packet from the downstream channel 60, the return packet serves as an
15 acknowledgment to indicate a successful transmission.

The originating settop terminal 10 recognizes the packet as the packet that it created by examining the header, which will indicate the packet sender's address. If the transmitting settop terminal 10 does not receive this "acknowledgment" packet within a predetermined
20

period of time, plus a guardtime, it will assume that the packet collided with a competing packet or was lost, and the settop terminal 10 will retransmit. All other settop terminals 10 will ignore this packet, recognizing it as an ACK for a Type I message. The message router 50 will forward the packet to the appropriate network destination.

5 Type II messages are longer and leverage the capacity enhancing aspect of the present invention. If the settop terminal 10 has a large message to send, it first calculates the amount of bandwidth 'reservation' it requires on the upstream channel in order to transmit the message in a continuous stream. A Type I reservation packet, (hereinafter "reserve request" packet), is created in the settop terminal with these values. The Type I
10 reserve a request packet is transmitted on a contention basis directly into the upstream channel 30. As aforementioned, the upstream transmitter 40 forwards a copy of the reserve request packet 15 to the downstream transmitter 70, which further broadcasts the reserve request packet 15 through the downstream channel 60 to all of the settop terminals 10. This reserve request packet 15 will contain information on the length, (or number of packets), of
15 the following Type II message. All settop terminals 10, other than the requesting settop terminal, receiving a reserve request command 15, will backoff from upstream transmission for an optimum period of time, which is calculated based on the size of the Type II message as indicated in the Type I reserve request packet 15, plus and additional amount of guard time. The guard time may be a fixed period of time, or a calculated period of time based on
20 the number of current network participants, plus a randomized backoff time. Upon receipt of its originally transmitted reserve request packet, the requesting settop terminal 10 begins to transmit its Type II message after an appropriate guard time. Instead of transmitting during the "reservation period" described in the Type I reservation message, all other settop

MOT-D2149

terminals 10 will queue their upstream messages.

The upstream receiver 40 receives the incoming upstream packets of either the Type I (reservation or data message) or the Type II message and forwards them to the message router 50. The message router 50 will perform data packet re-assembly, error checking and error recovery on all incoming upstream messages. The message router 50, upstream receiver 40 and downstream transmitter 70, may all be located within a headend or remote from each other, but are only required to be logically connected. Additionally, the functions of the upstream receiver 40 and the downstream transmitter 70 can be combined into one unit, and/or combined with the message router 50.

If a large message has been transmitted, there will be a queuing of pending messages in other settop terminals 10. In order to prevent a large collision after a message has been transmitted, and to minimize the number of the queued messages at each settop terminal 10, a random backoff algorithm is employed. This random backoff algorithm minimizes network congestion by taking into account the size of the previously transmitted message as well as the number of participants on the network 5. In this way, if a large message was transmitted, a longer random backoff would be provided to allow time for the presumed larger number of settop terminals 10 who may have queued during that time to dissipate their requests in an orderly fashion. Upstream bandwidth can be additionally optimized by minimizing the amount of time in the guard band that is calculated by settop terminals 10 that are queuing to transmit.

The present invention also includes a mechanism to permit settop terminals 10 on the network to have a reasonable knowledge of how many other settop terminals 10 exist on the network and, therefore, to determine an optimum backoff time. This mechanism is

described in detail below.

If the number of settop terminals 10 on the network 5 are known, the backoff time can be dynamically calculated in accordance with the following algorithm. The probability that k packets will enter the network 5 in a time period τ is illustrated by the Poisson distribution shown below:

$$P(X = k) = L^{k\tau} e^{(-L\tau)} / k! \quad \text{Equation (1)}$$

where: k = number of packets that will enter the network in a time τ equal to the number of packets expected per user times the number of known users;

L = total average rate of packets sent (packets/sec) = N * T;

N = average number of packets per settop;

T = number of potential packet senders on the network; and

τ = amount of time reserved for the transmission of the previous message on the upstream channel (seconds).

The number of packets expected to be queued in period is equal to L. The simplest algorithm would provide a linear relationship between the number of expected packets and the average of a random backoff time such as:

$$\text{Backoff time} = L * \text{message size} + \text{guardband time} * R \quad \text{Equation (2)}$$

where: R = a random number between 0 and 1

As shown by Equation 1, it is important to accurately determine the number of current settop terminals 10 on the network 5 in order to maximize bandwidth usage. In one embodiment of the present invention, there is a unique method of tracking the total number of concurrent settop terminals 10 on the network 5, which uses the settop terminals 10

themselves to determine how many users are on the network 5 at any time. This method is based on having the last settop terminal 10 to "join" the network 5 increment a count of known settop terminals 10 on the network 5. These special network messages are sent the same way as the Type I messages, (i.e. they are transmitted from the settop terminal 10 to the upstream receiver 40 and sent over to the downstream transmitter 70 for receipt by all connected settop terminals 10).

In one embodiment, when a settop terminal 10 first enters the network 5, it listens for a special network message that is periodically sent from the last settop terminal 10 that entered the network 5. If the new settop terminal 10 does not hear this special message within a certain period of time, it assumes that it is the only settop terminal 10 on the network 5 and begins transmitting the special network message. In essence, the message states that there is one settop terminal 10 on the network 5. When a second settop terminal 10 enters the network 5, it listens for the network message. When it hears the message indicating that there is one settop terminal 10 on the network 5, it begins to transmit the network message indicating that two settop terminals 10 are on the network 5. When the original settop terminal 10 hears another settop terminal 10 increment the network message, it ceases its transmission but keeps track of its original network number.

When a third settop terminal 10 enters the network 5, it hears the message of the second settop terminal 10 and begins to transmit the network message indicating that three settop terminals 10 are on network 5. The second settop terminal 10 ceases transmitting the message when it hears the incremented message, but it also keeps track of its original network number. This process continues as new settop terminals 10 enter the network 5, and will permit all settop terminals 10 to know exactly how many settop terminals 10 are

MOT-D2149

connected to the network 5. All settop terminals 10 that enter the network 5 will assign themselves a "network number" corresponding to their entry time onto the network 5. The network number of the settop terminal 10 that is currently transmitting the network message will be included in that message. A new settop terminal 10 will take the subsequent number.

5 If there is a collision with a settop terminal 10 that already has that number, the colliding settop terminal 10 will send a network message to indicate collision and the new settop terminal 10 will choose the next higher number. This numbering mechanism will allow the settop terminals 10 to know who should transmit if the transmitting settop terminal 10 leaves the network; the settop terminal 10 with the next highest network number will be begin transmitting.

10 If a settop terminal 10 knows that it is leaving the network 5, it will issue a special network message to the rest of the settop terminals 10 indicating that it is leaving, which will indicate to the currently transmitting settop terminal 10 to decrement the total terminal count. The leaving settop terminal 10 will stop transmitting this message when it sees the current network message decrement count by one.

15 Periodically, the entire network 5 will need to re-establish the number of settop terminals 10 to determine the number of units which have left the network 5 or become inactive. This will determine if any settop terminals 10 have left the network 5 without announcing. In one embodiment, the currently transmitting settop terminal 10 will send a
20 'recount' network message. Upon receipt of this message, the original settop terminal 10 will initiate the original counting process again. It will transmit the network message indicating that there is one settop terminal 10 on the network 5. Once that is received, the second settop terminal 10 will transmit. This continues until there is a missing settop terminal.

After a certain interval passes without a message from a settop terminal 10 incrementing the count, the successive settop terminal 10 will assume the number of the settop terminal 10 that has left. The successive settop terminal 10 sends out a special message indicating that it is "taking over" for the lost settop terminal 10 and that all subsequent settop terminals 10 should decrement their count by 1. If any settop terminals 10 enter or leave during this process, they can post their status at the end of the cycle.

In another embodiment, the total number of current settop terminals 10 is tracked at a communication center within the headend. Each time a settop terminal 10 enters or leaves the network 5, it will issue a message to inform the communication server to increase or decrease the total number count. The communication server will periodically send information of the updated total number of settop terminals 10 to all settop terminals 10.

When it is needed, or on a periodic basis, the communication server will reinitialize the total number by resetting the total number and requesting all on-line settop terminals 10 to send in a message for recounting purposes.

Proper calculation of packet size is also important for optimizing the network bandwidth usage. When there is a high volume of potential traffic based on a large number of potential transmitters, a smaller Type I message length will help reduce collisions. This will require that more messages will need to be sent as Type II, but should reduce collisions on the Type I messages entering the network. When potential traffic is light, the reservation message could be made longer to accommodate a reasonable payload to accommodate a larger percentage of messages without the need for a reservation cycle. The simplest method of optimizing packet size is a linear relationship between the number of potential transmitters and the optimum packet size. An example of an algorithm is:

$$P = FT$$

Equation (3)

where: T = number of participants on the network;

P = packet size in ms; and

F = constant factor (tunable).

As those of skill in the art realize, other optimizing algorithms could also be used.

Figure 2 provides a comparison of message delivery times between ALOHA, TDMA and the present invention method assuming the transmission of uniform 6-data-packet messages. The X-axis is the number of settop terminals 10 concurrently sending a message and the Y-axis is the average delay time for a successfully received message. Under the simulated environment with 10% of settop terminals 10 instantaneously sending a 6-data-packet message, the present invention substantially reduces the delay time to receive a message successfully as compared to ALOHA or TDMA.

As shown in Figure 2, for example, in a total 1000 settop terminals network with 100 instantaneous settop terminals sending a 6-data-packet message, the average delay time for a full message delivery is approximately 13-14 seconds with a TDMA implementation. It takes an average eight seconds delay time for a full message delivery with a traditional ALOHA implementation. Meanwhile, using the present invention implementation, the delay time to receive a full message is reduced to less than three seconds.

Figure 3 is a comparison of packets per second throughput between ALOHA, TDMA and the present invention assuming the transmission of 6-data-packet messages. The X-axis is the number of settop terminals concurrently sending a message. The Y-axis is the number of packets successfully received. Under the simulated environment with 10% instantaneous settop terminals 10 sending a message, the present invention significantly improves the

success rate of messages received, as compared to ALOHA or TDMA.

Figure 4 is a comparison of message delivery times per second throughput between ALOHA, TDMA and the present invention. The X-axis is the number of instantaneous settop terminals 10 sending a message and the Y-axis is the average delay time for a successfully received message. Under the simulated environment with 40% settop terminals sending a 6-data-packet message, the present invention substantially reduces the delay time to receive a message, as compared to ALOHA or TDMA. As shown in Figure 4, with 100 instantaneous settop terminals sending a 6-data-package-message in a total 250 settop terminals network, the average delay time to receive a full 6-data-package message is eight seconds with a TDMA implementation. It takes an average three seconds to receive a full 6-data-package message with a traditional ALOHA implementation in a similar network. Under the same condition but with the present invention implementation, the delay time to receive a 6-data-package message is reduced to less than two seconds.

* * *

CLAIMS

What is claimed is:

1. A method of providing medium access control over an upstream channel in a communication network system serving a plurality of system users, having an upstream channel for carrying upstream messages from at least a subset of the plurality system users to a communication server and a downstream channel connecting said communication server to said system users of said subset, the method comprising the steps of:

(a) classifying upstream user messages as a type-one or a type-two message based on a predetermined factor wherein a copy of type-one messages will be distributed from a user of the subset of users to all users in said subset of users;

(b) for each type-two message defining a type-one message, as a reserve request, directed to all other users in the subset of users to reserve upstream channel usage to the sending user for sending a type-two message; and

(c) said users selectively buffering said messages such that type-one messages are buffered if a reserve message has been received and type-two messages are buffered until after its associated type-one message is sent and received by the other users.

2. The method of claim 1, wherein said upstream user message containing information to identify said message sender.

3. The method of claim 1, wherein said upstream user message containing information to identify the designated message receiver.

4. The method of claim 1, wherein said predetermined factor to classify type of message is based on the size of said message.

5. The method of claim 1, wherein said predetermined factor to classify type of message is based on the level of priority of said message.

6. The method of claim 3, wherein said type-two message designated receiver returns an acknowledge to said type-two message sender upon successfully receiving of said type-two message.

7. The method of claim 4, wherein said sending message using a standard packet cell data structure, wherein said message can be further segmented, encapsulated into a plurality of packet cells.

8. The method of claim 4, wherein the first packet cell of said multi-packet cell message contains the total number of packet cells for said message and each said packet cell having information to identify its packet cell sequence within the multi-packet cells.

9. The method of claim 2 whereby receiving a type-one message from downstream channel by said message sender serves as an acknowledgment to indicate that other users of said subset and said communication server successfully received said type-one message.

10. The method of claim 1, wherein said users buffering said messages for a predetermined period of time after receiving a reserve request.

11. The method of claim 1, wherein said users buffering said messages for an optimal backoff time using an algorithm to calculate such backoff time each time said user completes an upstream transmission or receives a reserve request from other user of said subset, basing on a plurality of factors including the message round-trip propagation time, the size of last upstream message sent by said user, and the total number of current on-line users of said subset tracked by said communication system.

12. The method of claim 7, wherein said packet cell of said message further comprising at least one header portion and at least one data portion; wherein one designated bit of the header portion is set to identify said packet cell as a reserve request.

13. The method of claim 11, wherein tracking said total number of current on-line users of said subset further comprising:

periodically sending the first special message containing said total number of current on-line users of said subset by the last log-in system user into said subset;

monitoring said first special message for a predetermined period of time when a new system user first log-in said subset called a "log-in" mode;

said new system user receiving said first special message starting to send periodically a second special message having said total number of current on-line users of said subset incrementing by one;

10 stopping sending said first special message by said last log-in system user
once receiving said second special message from said new system user, said new system user
becoming said last log-in system user of said subset;

 sending a third special message into said system by a system user ready to
log-out said subset;

15 said last log-in system user receiving said third special message decrementing
said total number of current on-line users of said subset by one; and

 resetting and recounting said total number of current on-line users of said
subset if needed.

14 The method of claim 13, wherein resetting and recounting further comprising:

 issuing a recounting message by said last log-in system user;

 putting all said current on-line users of said subset into said "log-in" mode;

 said last log-in system user issuing said first special message having total
number of current on-line user of said subset set to be one; and

 the rest of said current on-line users of said subset incrementing said total
number of current users of said subset by successively becoming said last log-in system user.

15 The method of claim 11, wherein tracking said total number of current on-
line users of said subset further comprising:

 monitoring said total number at said communication server;

5 updating said total number when said communication server receiving a
message sent by said system user becoming on-line or off-line;

periodically informing said on-line system users about said current total number of on-line users of said subset; and

if needed, said communication center reinitializing said total number of on-line users by requesting said on-line users of said subset responding to the recount request.

16. The method of claim 1, wherein said system further comprising:

grouping said system users into a plurality of subsets of users;

managing said subset of users by checking the type, the integrity of said sending message and the message traffic transmitting to/from said subset of users.

extracting a copy of said type-one message of said subset of users from said upstream channel and inserting it into said downstream channel connecting said subset of users; and

forwarding said upstream messages from said upstream channel to said communication server.

17. A CATV network system implementing medium access control mechanism, having a communication server, a downstream channel connecting said communication server with a plurality of settop users and carrying downstream messages and at least a upstream channel a plurality of settop users to said communication server and carrying upstream messages, the system comprising:

(a) means for classifying upstream user messages as a type-one or a type-two message based on a predetermined factor wherein type-one messages are communications by a user of the subset of users to other users in the subset of users;

(b) for each type-two message means for defining a type-one message, as a
10 reserve request, directed to all other users in the subset of users to reserve upstream channel
usage to the sending user for sending a type-two message; and

(c) means for said users selectively buffering said messages such that type-one
messages are buffered if a reserve message has been received and type-two messages are
buffered until after its associated type-one message is sent and received by th other users.

18. A CATV network system implementing medium access control mechanism,
having a headend, a downstream channel connecting said headend with a plurality of settop
users and carrying downstream messages, and at least an upstream channel connecting said
headend with a plurality of settop users and carrying upstream messages, the system
comprising:

(a) means for buffering the sending upstream message and classifying said
message as a type-one or a type-two message based on a predetermined factor by the
message sender;

(b) means for said message sender transmitting a copy of said buffered type-one
10 message into upstream channel immediately, otherwise means for issuing a special type-one
message, a reserve request, into said upstream channel immediately if said buffered message
is a type-two message;

(c) means for transferring said type-one message directly from said upstream
channel into said downstream channel;

15 (d) means for inducing other settop users received said reserve request from said
downstream channel to refrain from transmitting into said upstream channels for a period

MOT-D2149

of time equal to the reservation time plus additional guard band;

(e) means for transmitting a copy of said buffered type-two message into said upstream channel by said reserve request sender once received said reserve request it sent form said downstream channel;

(f) means for responding by said headend by sending an acknowledge to said type-two message sender to indicate successfully of receiving of said type-two message;

(g) mean for removing said buffered type-two message from buffering by said type-two message sender received said acknowledge; and

(h) means for re-transmitting said message after a predetermined period of time if the number of retries has not exceeded a predetermined maximum retry count.

19. The system of claim 18, wherein an optimal backoff time is calculated every time for each settop user completing transmitting said upstream message or receiving a reserve request form another user, comprising:

(a) means for tracking the number of concurrent settop users in said communication system;

(b) means for tracking the size of last message sent by said sending settop user; and

(c) means for calculating an optimal backoff time by using said number of concurrent settop users, said size of last message and round-trip propagation time.

20. The system of claim 18, further comprising:

(a) means for grouping a plurality of settop users with a downstream transmitter

MOT-D2149

between said headend and said settop users;

(b) means for grouping a plurality of users with a upstream transmitter between
5 said headend and said settop users; and

(c) means for forwarding a copy of said type-one message from said upstream
transmitter directly to said downstream transmitter wherein said type-one message will be
received by said plurality of settop users grouped by said downstream transmitter.

ABSTRACT

All upstream messages that are desired to be sent from one of a plurality of settop terminals sharing a common upstream channel are segmented into data packets through an adaptation layer before sending into the upstream channel by a settop terminal, using the present invention using a hybrid of contention and reservation methodologies. If the upstream message is lengthy, a user settop terminal can request and gain exclusive control over the upstream channel and transmit the message using a reservation and self-acknowledging mechanism. In accordance with the present invention, a combination reservation mechanism and calculation method to optimize random backoff time for upstream transmission is added to conventional contention based Media Access Control methods and this embodiment to substantially enhance performance.

Figure 1 Message MAC Data Flow

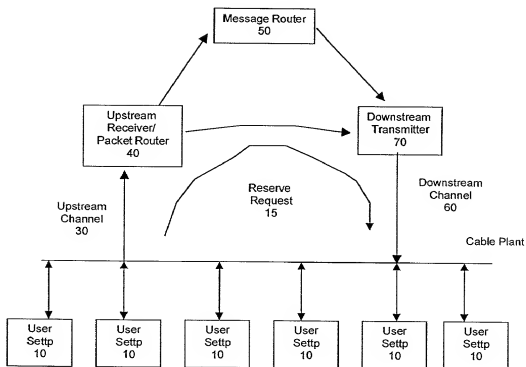


Fig 2

Figure 2 Average Delay times for
10% instantaneous usage 6pkt upstream

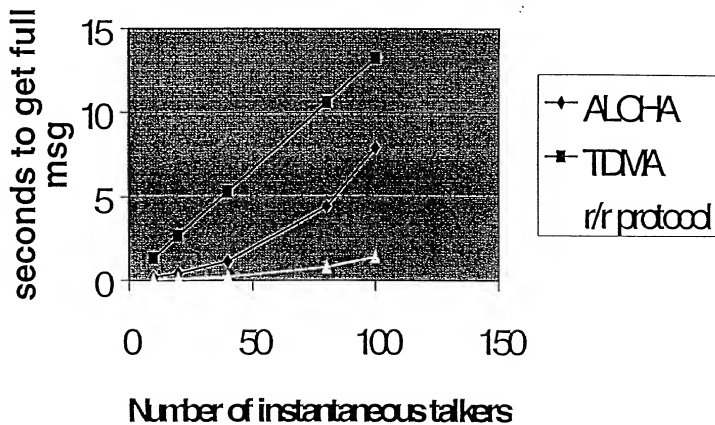


Fig 3

Figure 3 Throughput pkts/sec assuming 6 packet messages 10% instantaneous take rate

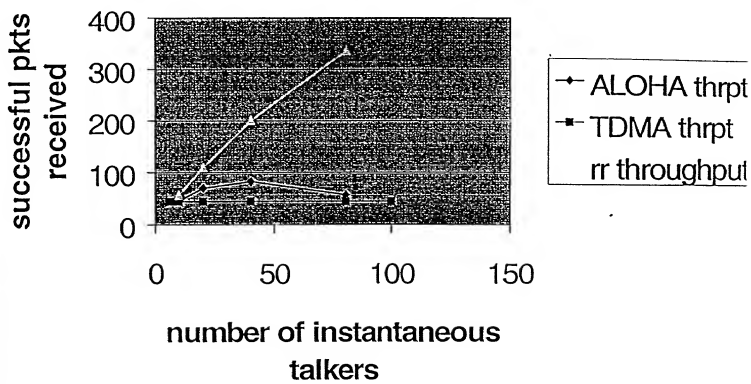


Fig 4

Throughput pkts/sec assuming 6
packet messages 40%
instantaneous take rate

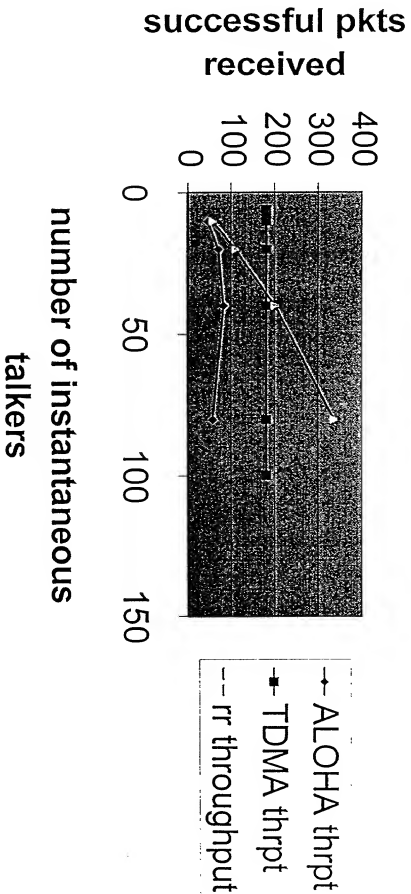


Fig 5

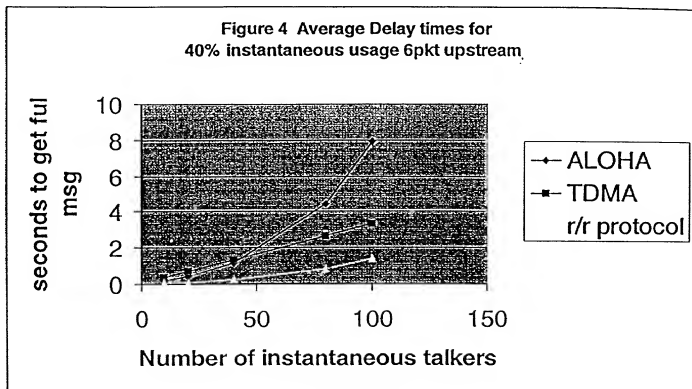



Figure 5

Please type a plus sign (+) inside this box → 

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN****PATENT APPLICATION
(37 CFR 1.63)**☒ DeclarationSubmitted
with Initial
Filing

OR

☐ DeclarationSubmitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)**Attorney Docket Number**

MOT-D2149

First Named Inventor

Raymond Bontempi

COMPLETE IF KNOWN**Application Number**

Not Yet Known

Filing Date

Not Yet Known

Group Art Unit

Not Yet Known

Examiner Name

Not Yet Known

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

RESERVATION/RETRY MEDIA ACCESS CONTROL

the specification of which

(Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☒ Customer Number 24375 OR ☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Namely, the Attorneys of Volpe and Koenig, P.C.			


☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label 24375 OR ☐ Correspondence address below

Name			
Address			
Address			
City	State	ZIP	
Country	Telephone	Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: Raymond Bontempi ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname	
Raymond		Bontempi	
Inventor's Signature		Date	7/14/00
Residence: City	State	Country	Citizenship
Jamison	PA	USA	USA
Post Office Address			
2097 Sturbridge Drive			
Post Office Address			
City	State	ZIP	Country
Jamison	PA	18929	USA

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto